


# Pilkington **Pyrostop**<sup>®</sup> 30-10

Resistance to Fire (EN 13501-2)	EI 30
Application	internal
Nominal Thickness	15 mm
Thickness Tolerance	± 1 mm
Weight	35 kg/m <sup>2</sup>
Direct Airborne Sound Insulation (EN ISO 140-3)	38 dB
Ug-value (EN 673)	5,1 W/m <sup>2</sup> K
Light Transmittance (EN 410)	87 %
g-value (EN 410)	75 %
Light Reflectance out / in (EN 410)	8 % / 8 %
Pendulum Body Impact Resistance (EN 12600)	2(B)2
Burglar Resistance (EN 356)	P1A
Reaction to Fire (EN 13501-1)	A2-s1, d0
Max. allowable temperature	- 40 °C to + 50 °C

There are no hazardous ingredients.  
The maximum size depends on the national / local approval of the glazing system.  
Tolerances may occur due to application and manufacturing.  
NPD = No Performance Determined.

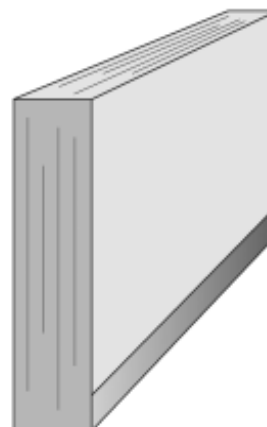

Multilaminated fire resistant glass according to EN 14449 of Pilkington **Optifloat**<sup>™</sup> with intumescent interlayers.

The pane is covered with a special edge protection tape on all edges.

This publication provides only a general description of the product. Further, more detailed information may be obtained from your local supplier of Pilkington products. It is the responsibility of the user to ensure that the use of these products is appropriate for any particular application and that such use complies with all relevant legislation, standards, code of practice and other requirements. To the fullest extent permitted by applicable laws, Nippon Sheet Glass Co. Ltd. and its subsidiary companies disclaim all liability for any error in or omission from this publication and for all consequences of relying on it.



[www.pilkington.com/CE](http://www.pilkington.com/CE)



**Pilkington Deutschland AG**  
Haydnstraße 19 45884 Gelsenkirchen  
Telephone: +49 (0)209 1680 Fax: +49 (0)209 1682056  
[fireprotection@nsg.com](mailto:fireprotection@nsg.com)