


# Pilkington Pyrostop<sup>®</sup> 90-102

Resistance to Fire (EN 13501-2)	EI 90
Application	internal
Norminal Thickness	37 mm
Thickness Tolerance	± 2 mm
Weight	84 kg/m <sup>2</sup>
Direct Airborne Sound Insulation (EN ISO 140-3)	44 dB
U <sub>g</sub> -value (EN 673)	4,2 W/m <sup>2</sup> K
Light Transmittance (EN 410)	84 %
g-value (EN 410)	71 %
Light Reflectance out / in (EN 410)	8 % / 8 %
Pendulum Body Impact Resistance out / in (EN 12600)	1(B)1
Burglar Resistance out / in (EN 356)	P1A
Reaction to fire (EN 13501-1)	NPD
Max. allowable temperature - 40 °C bis + 50 °C	

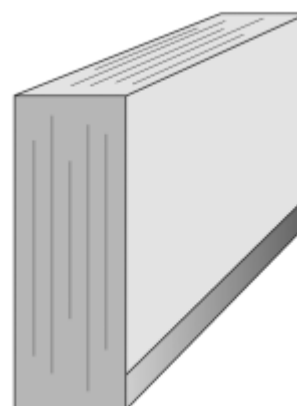

Multilaminated fire-resistant glass according to EN 14449 of Pilkington **Optiwhite™** with intumescent interlayers.

The pane is covered with a special edge protection tape on all edges.

There are no hazardous ingredients.  
The maximum size depends on the national / local approval of the glazing system.  
Tolerances may occur due to application and manufacturing.  
Attention to installing direction.  
NPD = No Performance Determined.

032015 BAT

This publication provides only a general description of the product. Further, more detailed information may be obtained from your local supplier of Pilkington products. It is the responsibility of the user to ensure that the use of these products is appropriate for any particular application and that such use complies with all relevant legislation, standards, code of practice and other requirements. To the fullest extent permitted by applicable laws, Nippon Sheet Glass Co. Ltd. and its subsidiary companies disclaim all liability for any error in or omission from this publication and for all consequences of relying on it. Pilkington and "Pyrostop" are trademarks owned by Nippon Sheet Glass Co. Ltd., or a subsidiary thereof.



[www.pilkington.com/CE](http://www.pilkington.com/CE)



**Pilkington Deutschland AG**

Haydnstraße 19 45884 Gelsenkirchen

Telephone: +49 (0)209 1680 Fax: +49 (0)209 1682056

E-mail: [fireprotection@nsg.com](mailto:fireprotection@nsg.com)

**[www.pilkington.com/fireprotection](http://www.pilkington.com/fireprotection)**